

ACP-2010MB / 2320MB

2U Rackmount Chassis for ATX/ MicroATX Motherboard with Low-Profile Rear Bracket Option




Features

- LED indicators and audible alarm notification for system fault detection
- Shock-resistant drive bays to hold one 5.25" and three 3.5" drives for ACP-2010MB (one front-accessible and two internal); one slim optical disk drive, two internal 3.5" drives and dual mobile SAS/SATA HDD trays for ACP-2320MB
- Various riser card options to support three full-size PCI or PCIe cards for expansion
- Supports 300 W / 400 W ATX PFC power supply
- Reusable and washable air filters



Specifications

Drive Bay	Slim Optical Disk Drive	Front-accessible	Internal
	5.25"	- / 1	-
	3.5"	1 / 0	-
Cooling	Fan	2 (8 cm /47 CFM each) / 2 (8 cm /47 CFM each) + 1 (6 cm /28 CFM)	
	Air Filters	Yes	
Front I/O Interface	USB	2	
	PS/2	1	
Miscellaneous	LED Indicators	Power, HDD, temperature, fan	
	Rear Panel	Two 9-pin D-Sub openings	
Environment	Temperature	Operating	Non-operating
	Humidity	0 ~ 40° C (32 ~ 104° F)	-20 ~ 60° C (-4 ~ 140° F)
	Vibration (5 ~ 500 Hz)	10 ~ 85 % @ 40° C, non-condensing	10 ~ 95 % @ 40° C, non-condensing
	Shock	1 Grms	2 G
Physical Characteristics	Dimensions (W x H x D)	10 G (with 11 ms duration, half sine wave)	30 G
	Weight	482 x 88 x 480 mm (19" x 3.46" x 18.9")	
		10.7 kg (23.5 lb) / 11.7 kg (25.7 lb)	

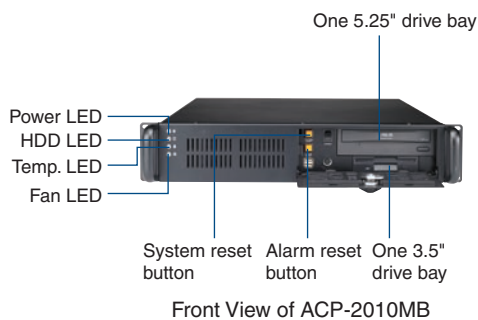


Front View of ACP-2010MB



Inside View of ACP-2010MB



Rear View

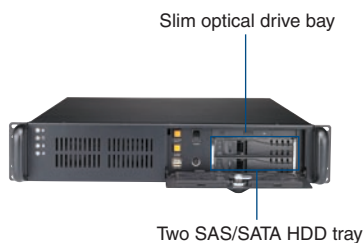

Front View of ACP-2320MB



Inside View of ACP-2320MB




Rear I/O bracket for low profile add-on cards


Dimensions

Unit: mm (inch)

ACP-2010MB

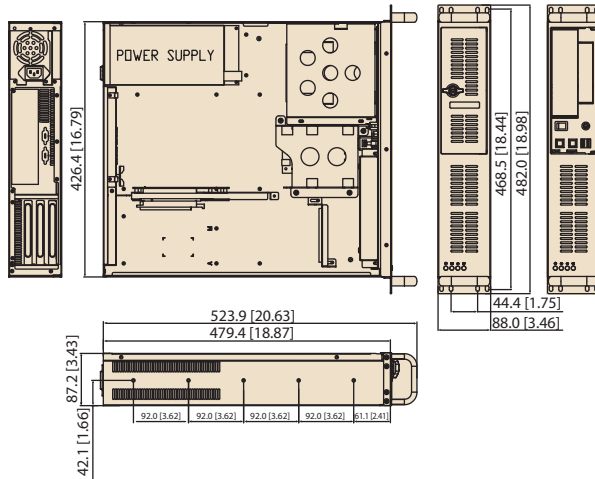

ACP-2320MB

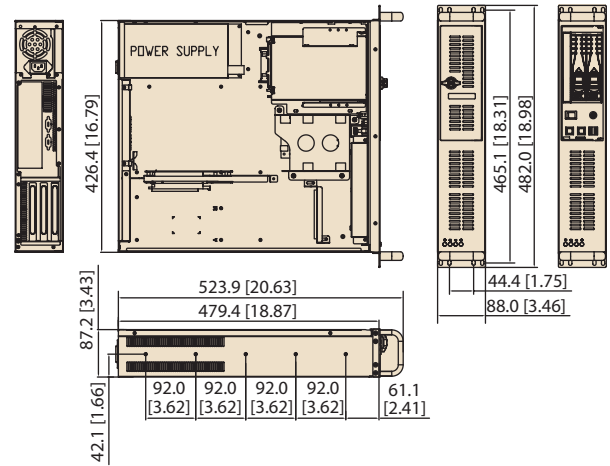

Power Supply Options

Part Number	Watts	Input	Output	Specifications		
				Mini-load	Safety	MTBF
1757000007G (ATX, PFC)	300 W	AC 100 – 240 V (full range)	+5 V @ 35 A, +3.3 V @ 20 A, +12 V @ 16 A, -5 V @ 0.5 A, -12 V @ 1 A, +5 Vsb @ 2 A	+5 V @ 3 A, +3.3 V @ 1 A, +12 V @ 2 A, -5 V @ 0.05 A, -12 V @ 0.05 A, +5 Vsb @ 0.1 A	UL/TUV/CB/CCC	97,800 hrs @ 25° C
1757000105G (ATX, PFC)	400 W	AC 100 – 240 V (full range)	+5 V @ 25 A, +3.3 V @ 20 A, +12 V @ 28 A, -5 V @ 0.5 A, -12 V @ 0.5 A, +5 Vsb @ 2 A	+5 V @ 3 A, +3.3 V @ 1 A, +12 V @ 2 A, +5 Vsb @ 0.1 A	UL/TUV/CB/CCC	100,000 hrs @ 25° C

Accessories

Part Number	Description
Rear I/O panel kit for low-profile add-on cards	
1939000361	Screw (should purchase 7 pcs)
1960034816N000	I/O bracket (should purchase 7 pcs)
1960019475T10B	Rear panel for low-profile
96DVR-40X-I-AS-B	Black 5.25" 16X/40X/24X DVDRW-ROM
96FDD-144-TE-B	Black 3.5" FDD
SDVD-FDD-COMBOE	5.25" storage kit with slim 8X DVD, 24X CD-RW & standard 3.5" black FDD
SDVD-COMBOE	5.25" storage kit with slim 8X DVD, 24X CD-RW & a 3.5" drive bay for FDD or HDD
SCD-FDD-COMBOE	5.25" storage kit with slim 24X CD-ROM & standard 3.5" black FDD
SCD-COMBOE	5.25" storage kit with slim 24X CD-ROM & a 3.5" drive bay for FDD or HDD
SDVD-CDRWE	Black slim 8X DVD + 24X CD-RW with 40-pin IDE connector
SCD-ROME	Black slim 24X CD-ROM with 40-pin IDE connector
1759200650	Fan 80 x 80 x 25 mm
1750000191	HDD Fan 60 x 60 x 25 mm (ACP-2320MB)
1700060202	Y-cable for PS/2 mouse and keyboard
9662132000E	Black 3.5" mobile HDD tray
9686000089	40-pin IDE transfer daughter board for slim ODD

Ordering Information

Part Number	Power Supply	Motherboard	Regulation
ACP-2010MB0-00XBE	Without power supply, with ATX switch	Supports AIMB-7XX & AIMB-5XX series. Riser card is not included.	-
ACP-2010MB0-30ZBE	1757000007G		CE
ACP-2320MB0-00XBE	Without power supply, with ATX switch		-
ACP-2320MB0-30ZBE	1757000007G		CE

Riser Card Options

Model Name	Interface	Expansion Slot	Motherboard
AIMB-R4301-03A1E	PCIe x4	Three PCIe x1	762/764/554/556, 762 & 554 only support one PCIe x1 (the lowest slot)
AIMB-R430P-03A1E	PCIe x4	Three PCI	AIMB-762/764/554/556
AIMB-R431F-21A1E	PCIe x4 + PCIe x16	One PCIe x16 + two PCIe x1	AIMB-762/764/554/556; 762 & 554 support only one PCIe x1 (the lowest slot) except one PCIe x16
AIMB-RP30P-03A1E	PCI	Three PCI	AIMB-740/742/744/750/766/542/552; AIMB-542 only support one PCI (the lowest slot)
AIMB-RP3PF-21A1E	PCI + PCIe x16	One PCIe x16 + two PCI	AIMB-763/562/564
AIMB-R43PF-21A1E	PCIe x16 + PCIe x4	one PCIe x16 + two PCI	AIMB-764/762/556/554

* The riser cards are specially designed to support all Advantech AIMB series motherboards. There might be compatibility issues with other vendors' motherboards, so an optional rear I/O bracket for low-profile add-on cards is provided.

* Please be informed that there may be mechanical conflict between your motherboard and add-on card while using the lowest slot of the riser card.