

TECH 4U 611-786

LGA 1151 Intel® Xeon® E & 8th/9th Gen. Core™ ATX Server Board with 4 DDR4, 7 PCIe, 6 USB 3.1, 8 SATA3, Dual LANs.



Conforming to
BIS Standard
IS 13252
(Part-1): 2010



CE FCC

Features

- LGA 1151 Intel® Xeon® E & 8th/9th Generation Core™ i7/i5/i3 processors with C246 chipset.
- DDR4 2666/2400/2133 MHz ECC/Non-ECC UDIMM up to 128 GB.
- One Gen 3.0 PCIe x16 link (or two PCIe x16 slots with x8 link), two PCIe x4 and three PCIe x1 slots.
- Triple displays - DVI-D, VGA and HDMI 2.0 ports
- Eight SATA3 ports (supports s/w RAID 0, 1, 5, 10 and five USB 3.1 ports.
- Supports 400 W ATX PFC PS/2 power supply and redundant ATX power supplies.
- Easy to install front-accessible drive bays to hold three 5.25" and one 3.5" disk drives.
- Front-accessible USB & PS/2 interfaces.
- Designed to withstand environmental extremes, such as shock, vibration and high temperature.
- Front LEDs indicate power status, and HDD activity.
- Lockable front door prevents unauthorized access.
- Dual front-accessible filtered cooling fans provide optimized and streamlined airflow.
- Supports Internal 5.25" DVD-RW.

Note: Supported OS including Windows 10 (64-bit) and Server 2016/2019 (64-bit) have been validated.

Specifications

Form Factor	Socket	ATX form factor				
Processor System	CPU type	Intel LGA 1151				
Core Logic	Chipset	Intel® Xeon® E-21xx/E-22xx and 8th/9th Generation Core™ i3/i5/i7 series (TDP up to 95W)				
Memory	Total slots	4 (Dual Channel)				
	Max. capacity	128 GB				
	Memory type	DDR4 ECC/Non-ECC 2666/2400/2133 MHz UDIMM (288-pin)*				
	Memory size	4 GB, 8 GB, 16 GB, 32GB				
Expansion Slots	Total PCI/PCI-X/PCIe slots	7				
	Slot location 1	PCIe x1				
	Slot location 2	PCIe x4 slot (Gen3 x4 link)				
	Slot location 3	PCIe x1				
	Slot location 4	PCIe x16 slot (Gen3 x8 link)				
	Slot location 5	PCIe x1				
	Slot location 6	PCIe x16 slot (Gen3 x8 or x16 link)				
Graphics	Slot location 7	PCIe x4 slot (Gen3 x4 link)				
	Controller	Intel HD Graphics**				
Storage	VRAM	1 GB maximum shared memory with 2 GB and above system memory installed				
	SATA controller	Intel C246: 8 SATA3 6 Gb/s ports with Intel Rapid Storage Technology Enterprise support (for Windows only) (Supports software RAID 0, 1, 10 & 5)				
	SAS controller	-				
Networking	Interface	10/100/1000 Mbps				
	Controller	GbE LAN1: Intel I219; GbE LAN 2-4: Intel I210-AT				
	Connector	RJ-45 x 2 for G2 version; RJ-45 x 4 for G4 version				
Onboard I/O Connector	Printer Port connector	1				
	PSU connector	24-pin SSI power connector + 8-pin SSI 12V power connector				
	USB connector	1 USB 3.1 Gen 1 (2 ports), 3 USB 2.0 (6 ports), 1 USB Type-A				
	Fan header	5 (4-pin)				
	SMBus	1				
	Chassis intruder	1				
	Front LAN LED	2				
	Serial port header	2 (RS-232)				
	Audio connector	1 (ALC 892)				
	PS/2 KB/Mouse	1 (Optional PS/2 KB/Mouse cable and bracket required)				
Rear I/O Connector	External serial port	- (via COM cable in the package)				
	External USB port	4 (USB 3.1 Gen 2)				
	VGA port	1 (Resolution up to 1920 x 1200 @ 60 Hz)				
	DVI port	1 (Resolution up to 1920 x 1200 @ 60 Hz)				
	HDMI port	1 (Resolution up to 4096 x 2160 @ 60 Hz)				
	RJ-45	2 for G2 version; 4 for G4 version				
	Audio connector	2 (Mic-in, Line-out)				
	PS/2 KB/Mouse	-				
Watchdog Timer	Output	System reset				
	Interval	Programmable 1 ~ 255 sec				
Power Requirement	Power On	3.3 V	5 V	12 V	12V_8P	5 Vsb -12 V
	(Xeon E-2176G 3.7GHz DDR4 2400 4G*4)	3.44A	2.61A	1.04A	6.3A	0.09A -0.02A
Environment	Operating	Non-operating				
	Temperature	0 ~ 60° C (32 ~ 140° F)				
	Humidity	10 ~ 95% (Non-condensing)				
Physical Characteristics	Dimensions (W x H x D)	482 x 177 x 479 mm (19" x 7" x 18.9")				

* ECC will not be supported when paired with Core i5/i7 processors.


** Some Xeon processors have no graphic support. Please check Intel specification for processor graphics availability.

technics

Industrial Computers

All product specifications are subject to change without notice

Block Diagram

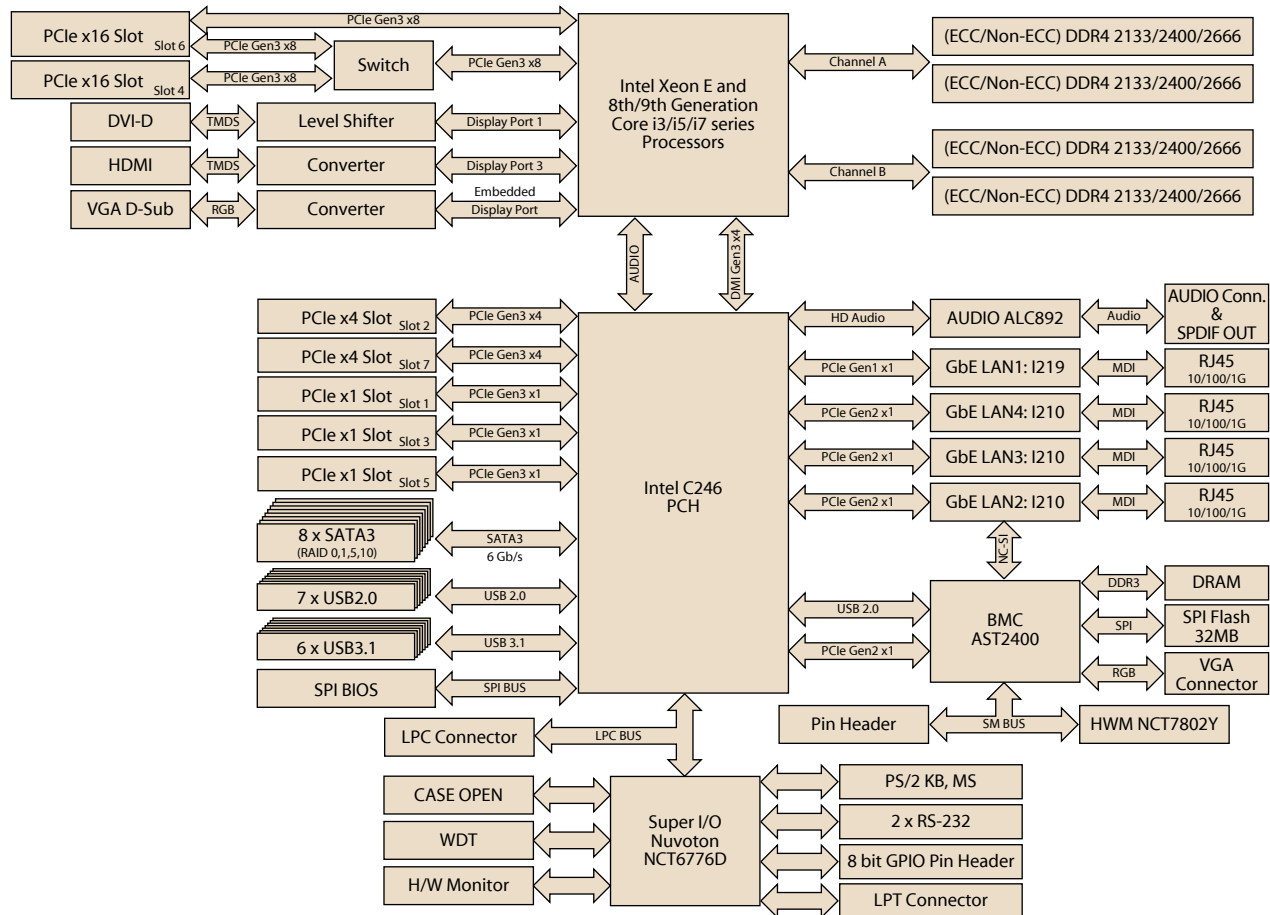

Ordering Information

Part Number	Chipset	Memory	Display	LAN	SATAIII	SW RAID
TECH 4U 611-786	C246	DDR4 Non-ECC/ECC UDIMM	VGA + DVI-D + HDMI	2	8	Yes

Front View



Rear View



Bracket View

