

TECH 4U 811-813

**LGA 2011-R3 Intel® Xeon® E5-2600 v3/v4
ATX Server Board with 8 DDR4 DIMM,
5 PCIe x16 Slot, 6 USB 3.0, IPMI**



Conforming to
BIS Standard
IS 13252
(Part-1): 2010

Features

- ATX Server Board with Intel® Xeon® E5-2600 v3/v4 processor
- Eight DDR4 2400 MHz RDIMM up to 256 GB and support DDR4 NVDIMM
- Seven PCIe expansion slots: five PCIe x8 (or two x16 and one x8), one PCIe x4 and one PCIe x1.
- Supports Redundant ATX power supplies.
- Easy to install front-accessible drive bays to hold three 5.25" and one 3.5" disk drives.
- Front-accessible USB & PS/2 interfaces.
- Designed to withstand environmental extremes, such as shock, vibration and high temperature.
- Front LEDs indicate power status, and HDD activity. - Lockable front door prevents unauthorized access.
- Dual front-accessible filtered cooling fans provide optimized and streamlined airflow.
- Supports Internal 5.25" DVD-RW.




CE FCC

Specifications

Form Factor	ATX form factor				
Processor System	Socket	Intel LGA 2011-R3			
	CPU type	Intel® Xeon® E5-2600 v3/v4 Series (CPU cooler should be purchased separately and TDP up to 160W) Intel® Xeon® E5-1600 v3/v4 Series Intel® Core™ i7 6850K/6900K/6950X			
Core Logic	Chipset	Intel C612 chipset			
Memory	Total slots	8 (Quad Channel)			
	Capacity	Maximum 256 GB ECC RDIMM			
	Memory type	DDR4 ECC-REG 2400/2133/1866/1600 MHz DIMM and NVDIMM (working with Xeon E5) DDR4 ECC/Non-ECC 2400/2133/1866/1600 MHz UDIMM (working with Core i7 only)			
	Memory size	4 GB, 8 GB, 16 GB, 32 GB			
Expansion Slots	Total PCI/PCI-X/PCIe slots	7			
	Slot location 1	PCIe x1 slot (Gen2 x1 link), signal from PCH			
	Slot location 2	PCIe x16 slot (Gen3 x8 link)			
	Slot location 3	PCIe x16 slot (Gen3 x8 link)			
	Slot location 4	PCIe x16 slot (Gen3 x16 link or x8 link when Slot 3 is occupied)			
	Slot location 5	PCIe x16 slot (Gen3 x8 link)			
	Slot location 6	PCIe x16 slot (Gen3 x16 link or x8 link when Slot 5 is occupied)			
Graphics	VGA	Aspeed AST2400/1400 64 MB			
Storage	IDE controller	-			
	SATA controller	Intel C612: 8 SATA3 6 Gb/s ports Intel Rapid Storage Technology (for Windows only) (SATA0-SATA3 and sSATA0-sSATA3 support software RAID 0, 1, 10 & 5)			
	SAS controller	-			
Networking	GbE LAN	2 x Intel I210AT			
Onboard I/O Connector	LPC connector	1			
	PSU connector	24-pin SSI power connector + 8-pin SSI 12 V power connector + 8-pin SSI 12 V power connector			
	USB connector	2 (supports 2 x USB3.0 ports and 2 x USB2.0 ports) + 1 x Type-A			
	Fan header	5 x 4-pin			
	SMBus	1			
	Chassis intruder	1			
	Front LAN LED	2			
	Audio Header	1			
	Serial port header	1			
	External serial port	1			
Rear I/O Connector	External USB port	6 (4 x USB3.0 + 2 x USB2.0)			
	VGA port	1			
	RJ-45	2			
	PS/2 KB/mouse	1			
Management Solution	Software	-			
	Out of band remote management	Yes (with IPMI only)			
Monitoring	CPU temperature	Yes			
	System Monitoring	Yes			
Watchdog Timer	Output	System reset			
	Interval	Programmable 1 ~ 255 sec/min			
Power Requirement	Power On	3.3V	5V	12V	5Vsb -12V
	120W CPU@2.5GHz DDR4 2133 4GB x8	1.53A	0.92A	12.21A	0.04A 0.04A
Environment	Operating	Non-operating			
	Temperature	0 ~ 60 °C, depends on CPU speed and cooler solution			
	Humidity	10% ~ 95% (Non condensing)			
Physical Characteristics	Dimension (W x H x D)	482 x 177 x 479 mm (19" x 7" x 18.9")			

Block Diagram

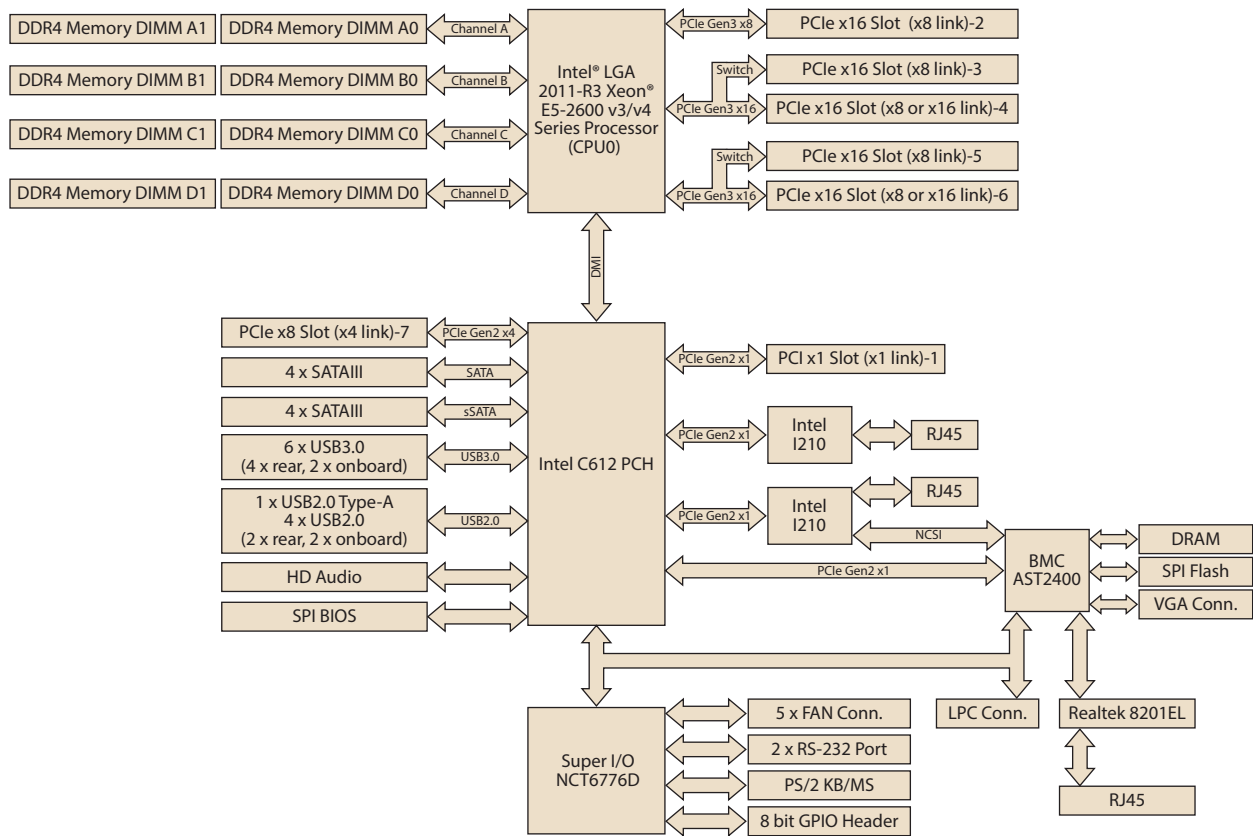

Ordering Information

Part Number	Chipset	Memory	GbE LAN	IPMI	Graphics
TECH 4U 811-813	C612	8 x DDR4 RDIMM	2	Optional	AST 1400

Front View



Rear View



Bracket View

