

4U Rackmount Industrial PC with 8th/9th Generation Intel® Core™ Processor

Industrial PC



Features

- 8th/9th Generation Intel® Core™ LGA1151 Processor
- Supports Max. TDP 6 Core 95W
- DDR4 2666/2400/2133 MHz, max. 64GB
- Two Independent Displays: HDMI x 1, VGA x 1, DP x 1
- Dual Intel® Gigabit Ethernet, i211AT x 1, i219V x 1
- USB 3.2 Gen1 ports x 4, USB 2.0 ports x 5
- M.2 2280/2242 M-key (PCIex1/SATA3) x 1
- TPM Onboard (optional)




Specifications

System	
Processor	Intel® 8th/9th Generation (Coffee Lake-S/Coffee Lake-S Refresh) Core™ i9/ i7/ i5 /i3, Pentium 14nm LGA 1151 socket Processor, Max. 6 Core 95W
Chipset	Intel® H310 Express Chipset
Memory	DIMM x 2, DDR4 (2666/2400/2133 MHz, max. 64GB) non-ECC, un-buffered memory Dual channel memory architecture
I/O Chipset	NCT6793D+ F81216HD
Ethernet	Intel® PHY i219V Giga LAN x 1 Intel® i211AT Giga LAN x 1 RJ45 x 2
Audio	Realtek® ALC887 6-Channel High Definition Audio CODEC
TPM	Nuvoton NPCT750AABYX TPM2.0 onboard (optional, default: N/A)
Expansion Slots	PCIe 3.0[x16] Slot x 1, PCIe 2.0[x4] Slot (open edge) x 2 (#1: 1Lane #2: Default: 2Lanes, only support 1Lane when Mini PCIe slot is installed), PCI x 3, M.2 2280/2242 M-key (PCIex1/SATA3) x 1, Mini PCIe + Micro SIM card Slot (optional, default: N/A)
BIOS	128Mbit Flash ROM x 1, AMI BIOS
H/W Monitor	Temperature Monitor on CPU/Chassis, Voltage Monitor on Vcore/5V/3.3V/12V, Fan Monitor on CPU/Chassis
WatchDog Timer	1~255 steps by software program
Smart Fan Control	CPU Fan/ Chassis Fan x 2
Wake On LAN/ PXE	Yes (WOL / PXE)
Power State	S3, S4, S5
Graphics	
Graphics Chipset	Intel® Graphics Media Accelerator
Graphics Multi Display	HDMI+VGA+DP
VGA	Up to 1920 x 1200 @60Hz (via IT6516B)
DVI	—
HDMI	Up to 4096 x 2160 @ 30 Hz
Display Port	Up to 4096 x 2160 @ 24 Hz / 3840 x 2160 @ 60 Hz, with Digital Audio
LVDS	—
eDP	—
Backlight Control	—
Environment & Power & ME	
Battery	Lithium battery
Power Requirement	24-pin ATX connector x 1, 8-pin (2x4) ATX 12V Power connector x 1
Operation Temperature	32°F ~ 140°F (0°C ~ 60°C)
Storage Temperature	-40°F ~ 185°F (-40°C ~ 85°C)
Operation Humidity	0% ~ 90%RH, non-condensing
Dimensions (D x W x H)	480 mm x 427 mm x 177 mm

Weight	1.76 lb (0.8 Kg)
MTBF (Hours)	285,600
Rear Panel I/O Ports	
USB	USB 3.2 Gen 1 ports x 2, USB 2.0 ports x 4
Display I/O	HDMI x 1, VGA x 1, DP x 1
Audio I/O	Audio Jack x 3: Line-in, Mic-in, Line-out
LAN I/O	LAN (RJ45) ports x 2
Serial Port	DB-9 COM x 1 (supports RS-232/422/485, 5V/12V/RI)
PS/2 Port	—
Others	—
Internal I/O Connectors	
Storage	SATA III (6.0Gb/s) ports x 3, support RAID 0/1/5/10 M.2 2280/2242 M-key (PCIex1/SATA3) x 1
USB	USB 3.2 Gen 1 headers support additional 2 USB ports (2x5PIN, p=2.54mm) x 1, USB 2.0 Type A (vertical) x 1
Display I/O	—
Audio I/O	Speaker header (Line-out) x 1, AAFP x 1
Serial Port	RS-232 headers x 5
PS/2 Port	—
Parallel Port	—
DIO	8-bit Digital I/O interface (In/Out programmable) x 1
FAN	CPU Fan connector(s) (4-pin) x 1, Chassis Fan connector(s) (4-pin) x 2
Power	—
Others	Chassis Intrusion x 1, AT/ATX mode select jumper x 1, Front panel header x 1, Clear CMOS jumper x 1
OS	
OS Support	Windows® 10 64bit, Linux Ubuntu 64 bit (18.04.3/Kernal5)


Rear View



Front View



Block Diagram

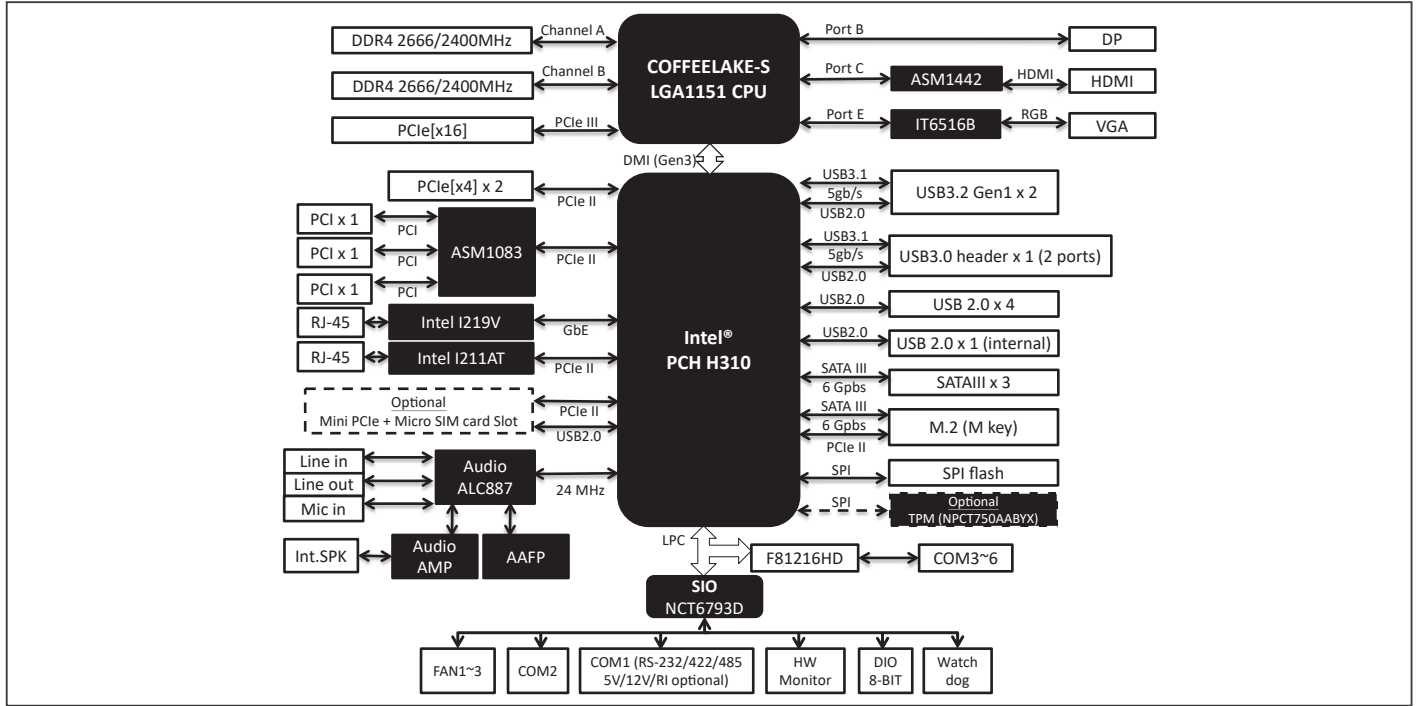

Ordering Information

Part number	CPU	RAM	Fan/ Fanless	Display	LVDS	Storage	LAN	USB	RS-232	RS-232 /422/485	Expansion Slot	Power	TPM	Temp.
TECH4U310	LGA 1151 socket	DDR4 2666/2400/2133	Fan	HDMI x 1 VGA x 1 DP x 1	—	SATA3 x 3, M.2 2280/2242 M-key x 1	Intel@GbE x 2	USB 3.2 Gen 1 x 2 USB 2.0 x 4 USB 3.2 Gen 1 header x 1 USB 2.0 type A (vertical) x 1	5	1	PCIe[x16] x 1, PCIe[x4] (open edge) x 2 (#1: 1Lane, #2: 2Lanes), PCI x 3, M.2 2280/2242 M-key x 1	ATX	—	32°F ~140°F (0°C ~ 60°C)